


Downlights

PIZZA PAL




- Lighting technology LED
- With height-adjustable diffuser in three positions at the ceiling
- Supply unit included
- Connection data: 220-240 V, 50/60 Hz
- Connection of light fitting to mains by means of 3-pole terminal block.
- DALI Lighting control system is possible
- Weight approx. 2.2 kg
- Colors: white/anthracite/silver

ERC  IP20

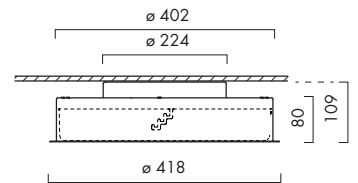


height-adjustable
in three positions
at the ceiling

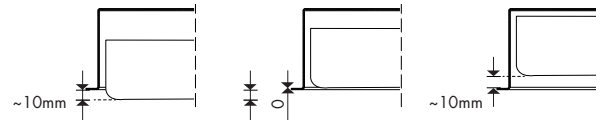

Photometric data	CRI Light colour	Lumen category	P _{system}	Efficiency	Reflector
	830	max. 2650 lm	45 W	59 lm/W	VWFL
	840	Photometric data on request			

The information for the photometric values are standard values and refer to the entire luminaire.



h[m]	E[lx/klm]	E[lx/klm]
1.0	332	325
2.0	664	80
3.0	996	35
4.0	1328	20
ø[cm]		