

Systems


LIGHTSTRIPE LEL

ERC  IP20


- Lighting technology LED
- Function panel (1 or 2 modules) with downlight
- Fitting of the function panel in the frame without the use of tools
- With integral reflector MFL, FL, WFL or VWFL
- Supply unit included
- Connection data: 220-240 V, 50/60 Hz
- Connection to power supply by Wieland plug GST18i3; cable length l = 0.5 m
- DALI and EASY-Lighting Control system is possible (Easy Lighting Control not for use in metal ceilings)
- Weight approx. 0.9 kg (1 module), 1.5 kg (2 modules)
- Colors: white/anthracite/silver



1 module

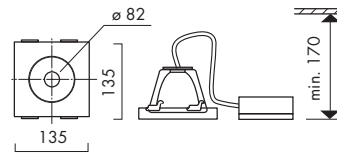

2 modules

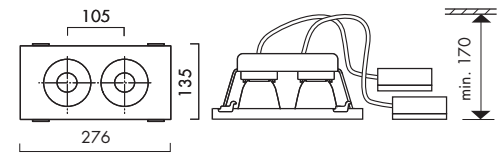

Photometric data 1 module	CRI Light colour	Lumen category	P _{system}	Efficiency	Reflector
	830	2000 lm	17 W	125 lm/W	FL WFL VWFL
	3000 lm	29 W	107 lm/W		
840 927 Brilliant (930) = Best Color/Best White	Photometric data on request				

The photometric values are standard values and refer to the entire luminaire.
In the case of CRI ≥ 90 the efficiency is approx. 10-15 % lower.

