



Recessed spotlights

NAVO NEK_DF




- Lighting technology LED
- Spotlight as directional washer
- With integral reflector DF-NB or reflector DF-NX
- Interchangeable reflectors
- Connection data: 220-240 V, 50/60 Hz
- Connection to power supply by Wieland plug GST18i3; wire length l = 0.5 m
- DALI control system is possible
- Weight approx. 1.7 kg
- Colors: white/anthracite/silver

ERC IP20

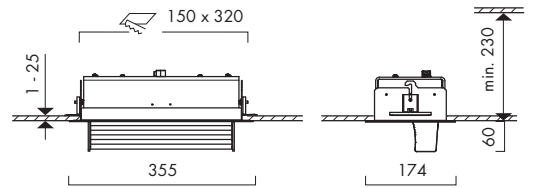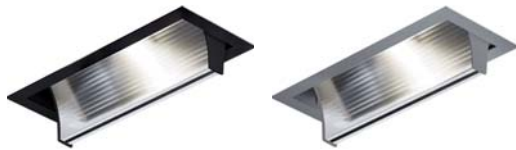


Photometric data	CRI Light colour	Lumen category	P _{system}	Efficiency	Reflector
	830	4000 lm	32 W	130 lm/W	DF-NB DF-NX
		6000 lm	47 W	130 lm/W	
	840 927	Photometric data on request			

The photometric values are standard values and refer to the entire luminaire.
In the case of CRI ≥ 90 the efficiency is approx. 10-15 % lower.

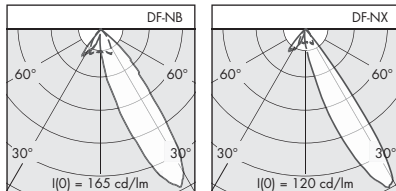


Planning information

DF-NB
preferred ceiling height
3.00 m

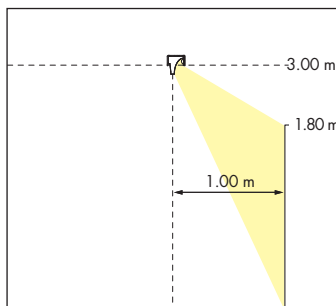

DF-NX
preferred ceiling height
3.30 m

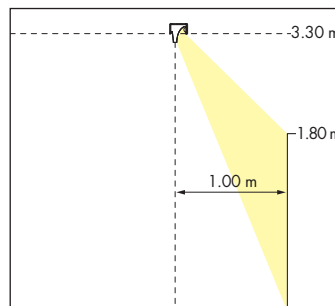

Other aisle widths on request.

Optional accessories

Safety glass

Article number

17 AD 0101

Set of end lamellae reflectors for lateral glare suppression
(1 pair left/right)

for NB reflector
for NX reflector

17 RF 2000

17 RF 2001

Set of interchangeable reflector (1x reflector/1x lamellae)

NB reflector
NX reflector

17 RF 2002

17 RF 2003

Reinforcing panel for brittle ceiling systems

17 VP 0080