


Downlights

PIZZA PLL




- Lighting technology LED
- With height-adjustable diffuser in three positions at the ceiling
- Supply unit included
- Connection data: 220-240 V, 50/60 Hz
- Connection of light fitting to mains by means of 3-pole terminal block.
- DALI Lighting control system is possible
- Weight approx. 2.2 kg
- Colors: white/anthracite/silver

ERC  IP20

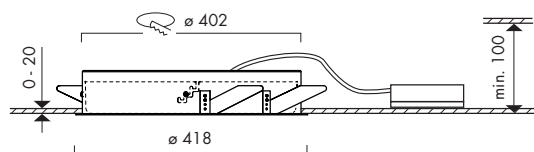


Diffuser height-adjustable
in three positions
at the ceiling

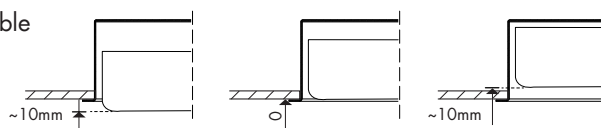

| Photometric data | CRI Light colour | Lumen category | P _{system} | Efficiency | Reflector |
|------------------|---------------------|-----------------------------|---------------------|------------|-----------|
| | 830 | max. 2650 lm | 45 W | 59 lm/W | VWFL |
| | 840 | Photometric data on request | | | |

The information for the photometric values are standard values and refer to the entire luminaire.



| h[m] | E [lx/klm] | |
|--------|------------|-----|
| 1.0 | 332 | 325 |
| 2.0 | 664 | 80 |
| 3.0 | 996 | 35 |
| 4.0 | 1328 | 20 |
| ø [cm] | | |