



Recessed spotlights

NAVO NEK_DDF




- Lighting technology LED
- Spotlight as two-directional washer
- With integral reflector DDF-NB or reflector DDF-NX
- Interchangeable reflectors
- Connection data: 220-240 V, 50/60 Hz
- Connection to power supply by Wieland plug GST18i3; wire length $l = 0.5$ m
- DALI control system is possible
- Weight approx. 2.2 kg
- Colors: white/anthracite/silver

ERC  IP20

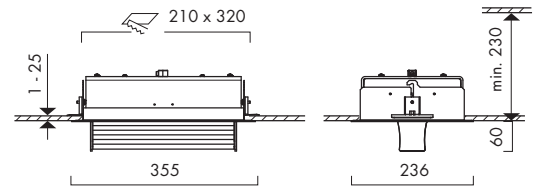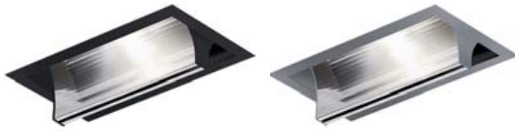


Photometric data	CRI Light colour	Lumen category	P _{system}	Efficiency	Reflector
	830	8000 lm	64 W	130 lm/W	DDF-NB DDF-NX
		12000 lm	94 W	130 lm/W	
	840 927	Photometric data on request			

The photometric values are standard values and refer to the entire luminaire.
In the case of CRI ≥ 90 the efficiency is approx. 10-15 % lower.

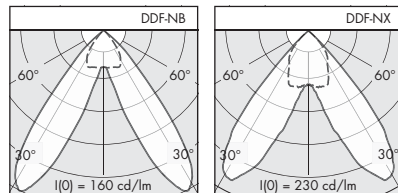


Planning information

DDF-NB
preferred ceiling height
3.00 m

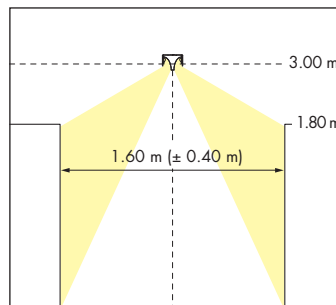

DDF-NX
preferred ceiling height
3.30 m

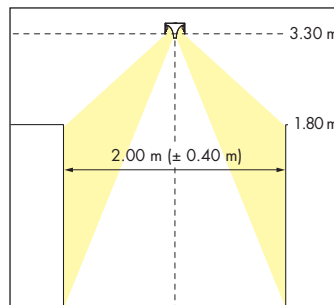

Other aisle widths on request.

Optional accessories

Safety glass (1 pair)

Set of end lamellae reflectors for lateral glare suppression
(1 pair left/right)

Set of interchangeable reflector (1x reflector/1x lamellae)

Reinforcing panel for brittle ceiling systems

Article number

17 AD 0100

for NB reflector
for NX reflector

17 RF 2000

17 RF 2001

NB reflector
NX reflector

17 RF 2002

17 RF 2003

17 VP 0079