


Semi-recessed spotlights

BOP BEL




- Lighting technology LED
- Tilting and turning (360°/60°)
- With integral re flector SP, MFL, FL or WFL
- Supply unit included
- Connection data: 220-240 V, 50/60 Hz
- Connection to power supply by Wieland plug GST18i3; wire length l = 0.5 m
- DALI and EASY-Lighting Control system is possible (Easy Lighting Control not for use in metal ceilings)
- Weight approx. 1.5 kg
- Colors: white/anthracite/silver

ERC  IP20

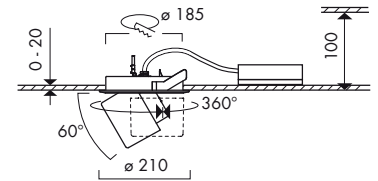

Photometric data	CRI Light colour	Lumen category	P _{system}	Ef ciency	Re flector
830	830	2000 lm	17 W	128 lm/W	SP MFL FL WFL
		3000 lm	26 W	119 lm/W	
		4000 lm	36 W	114 lm/W	
840 927 Brilliant (930) = Best Color/Best White Meat	Photometric data on request				

The photometric values are standard values and refer to the entire luminaire. In the case of CRI ≥ 90 the ef ciency is approx. 10-15 % lower.

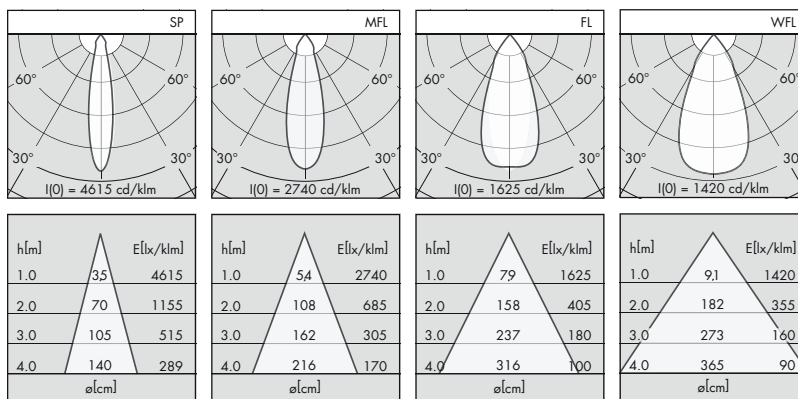

Optional accessories

Interchangeable re flector

Glare reduction asymmetric
Glare reduction cylindrical

	Article number
SP	17 HY2 BXX.
MFL	17 HY2 CXX.
FL	17 HY2 DXX.
WFL	17 HY2 EXX.
black	17 ZR 0001
black	17 ZR 0002