


Systems

LIGHTSTRIPE LWL




- Lighting technology LED
- Function panel (2 module) with wallwasher
- Fitting of the function panel in the frame without the use of tools
- With integral reflector WW
- Connection data: 220-240 V, 50/60 Hz
- Connection to power supply by Wieland plug GST18i3; cable length l = 0.5 m
- DALI and EASY-Lighting Control system is possible (Easy Lighting Control not for use in metal ceilings)
- Weight approx. 1.3 kg
- Colors: white/anthracite/silver

ERC  IP20

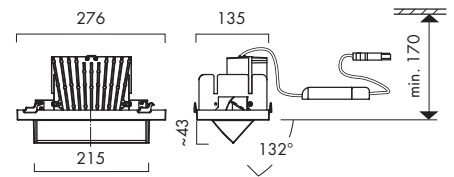

Photometric data	CRI Light colour	Lumen category	P _{system}	Efficiency	Reflector
	830	3000 lm	26 W	119 lm/W	WW
		4000 lm	36 W	114 lm/W	
	840 927 Brilliant (930) = Best Color/Best White	Photometric data on request			

The photometric values are standard values and refer to the entire luminaire.
In the case of CRI ≥ 90 the efficiency is approx. 10-15 % lower.



m	E _a / klm	
	0.5 m	1.0 m
0.1	0	0
0.5	265	134
1.0	2680	865
1.5	1050	645
2.0	295	410
2.5	105	240
3.0	45	120