


Suspended luminaires

PIAZZA PRL

ERE  IP20

- Lighting technology LED
- Suspended luminaire with diffuser
- Pendant mounting by means of twin wire suspension (5m) with grommets with adjustable hangers on the luminaire
- Transparent wire
- With four integral reflectors WFL or VWFL
- Supply unit included
- Connection data: 220-240 V, 50/60 Hz
- Connection of light fitting to mains by means of 3-pole terminal block.
- DALI Lighting control system is possible
- Weight approx. 6.0 kg
- Colors: white/anthracite/silver

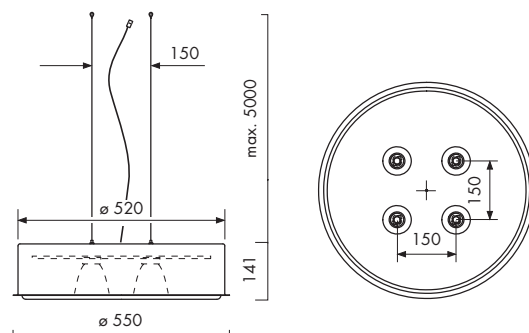

Photometric data	CRI Light colour	Lumen category	P _{system}	Efficiency	Reflector
	830	max. 11800 lm	108 W	109 lm/W	WFL VWFL
	840	Photometric data on request			

The photometric values are standard values and refer to the entire luminaire.
In the case of CRI ≥ 90 the efficiency is approx. 10-15 % lower.

