


# Spotlights CORAY CXS




- Lighting technology LED
- For three-circuit track (48 V)
- Tilting and turning (360°/90°)
- With integral collimator SSP, SP or MFL
- Connection data: 48 V/DC; 9 W
- Weight 0.2 kg
- Colors: white/anthracite/silver

IP20

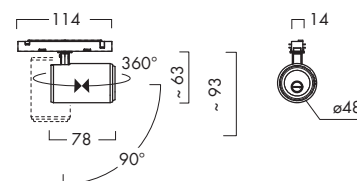

Photometric data	CRI Light colour	Lumen category	P <sub>system</sub>	Efficiency	Collimator
	830	max. 600 lm	<b>9 W</b>	67 lm/W	SSP SP MFL
930	Photometric data on request				

The information for the photometric values are standard values and refer to the entire luminaire. In the case of CRI ≥ 90 the efficiency is approx. 10-15 % lower.

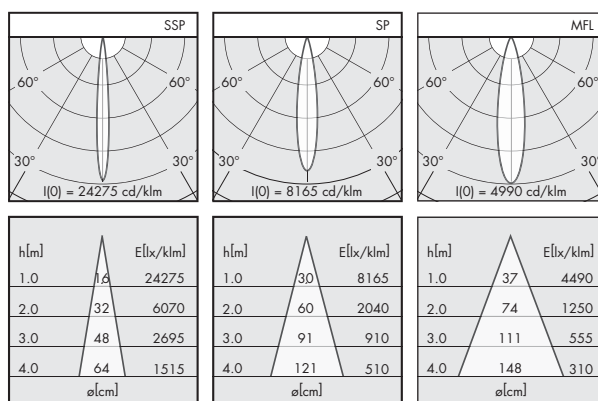

## Optional accessories

Accessory	Options	Article number
Interchangeable collimator	SSP	<b>17 CX 0001-01</b>
	SP	<b>17 CX 0001-02</b>
	MFL	<b>17 CX 0001-03</b>
48V-Track	l = 2000 mm	white <b>16 ET 55624102-1</b>
		black <b>16 ET 55624102-2</b>
	l = 3000 mm	white <b>16 ET 55624103-1</b>
		black <b>16 ET 55624103-2</b>
Feed piece	right	white <b>16 ETY 55624201-1</b>
		black <b>16 ETY 55624201-2</b>
	left	white <b>16 ETY 55624202-1</b>
		black <b>16 ETY 55624202-2</b>

# Spotlights

## CORAY CXS

---

### Optional accessories

		<b>Article number</b>
Connector	white	<b>16 ET 55624206-1</b>
	black	<b>16 ET 55624206-2</b>
End cap	white	<b>16 ET 55604117-1</b>
	black	<b>16 ET 55604117-2</b>
Suspension		<b>17 AH 0001</b>
Operating device	prim. 220-240V, 50/60Hz sek. 48V DC/75W	<b>27 VL 7205</b>
	prim. 220-240V, 50/60Hz sek. 48V DC/150W	<b>27 VL 7206</b>