

Suspended luminaires


CORAY CLP

IP20




- Lighting technology LED
- For three-circuit track or surface mounting
- Textile wire, black or white
- With integral reflector SP, MFL, FL or WFL
- Supply unit included
- Connection data: 220-240 V, 50/60 Hz
- Connection of light fitting to mains by means of 3-pole terminal block or 3-circuit adapter
- DALI and INspire-Lighting control system is possible
- Weight 2.3 kg
- Colors: white/anthracite/silver


with ceiling box

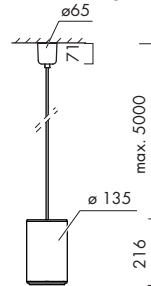

with ceiling plate

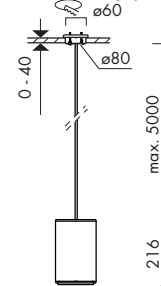


with 3-circuit adapter

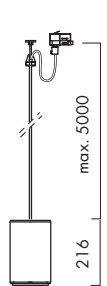

Photometric data	CRI Light colour	Lumen category	P _{system}	Efficiency	Reflector
	830	4000 lm	36 W	113 lm/W	SP MFL FL WFL
		5000 lm	46 W	110 lm/W	
	840 927 Brilliant (930) = Best Color/Best White Meat	Photometric data on request			

The information for the photometric values are standard values and refer to the entire luminaire. In the case of CRI ≥ 90 the efficiency is approx. 10-15 % lower.

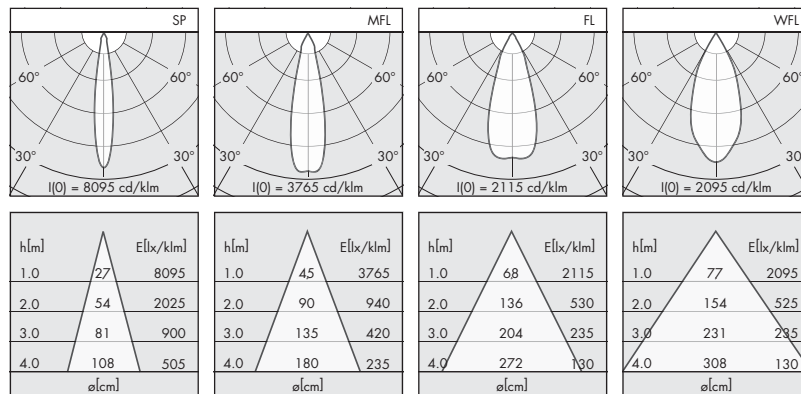

Optional accessories

Interchangeable reflector

SP 17 CL 0300-01
MFL 17 CL 0300-02
FL 17 CL 0300-03
WFL 17 CL 0300-04

Ceiling jack for adapter

white 16 NK 70319002
black 16 NK 70319003

Recessed ceiling jack

white 16 NK 70360002
black 16 NK 70360003