



Lightstack

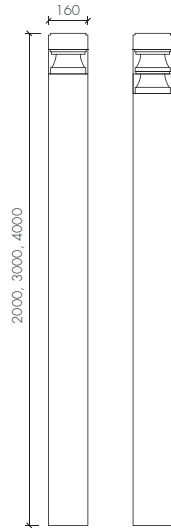


- LED
- Reflector : Asymmetric, Symmetric
- Body : Die-cast Aluminium, PC
- Head Size : Ø160 x H165 or H245mm
- Height : 2000mm / 3000mm / 4000mm
- Head Weight : 3.5 kg
- Protection grade : IP65

Photometric data

Reflector	CCT	P <sub>system</sub>	Φ <sub>system</sub>
Asymmetric	3000K 4000K	LED 25W	2400lm
		LED 48W	4800lm
	2700K	LED 26W	2400lm
		LED 51W	4800lm
Symmetric	3000K 4000K	LED 26W	2700lm
		LED 50W	5400lm
	2700K	LED 26W	2700lm
		LED 52W	5400lm




Asymmetric

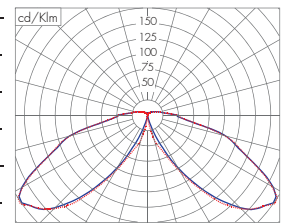

Symmetric


Bollard




- LED
- Reflector : Forward, Symmetric
- Body : Die-cast Aluminium, PC
- Size : Ø160 x H165mm
- Height : 800mm / 1000mm / 1200mm
- Protection grade : IP65

Photometric data

Reflector	CCT	P <sub>system</sub>	Φ <sub>system</sub>
Forward	3000K, 4000K	LED 12W	1200lm
		LED 13W	
Symmetric	3000K, 4000K	LED 14W	1500lm
		LED 15W	

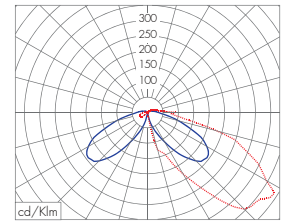


Forward

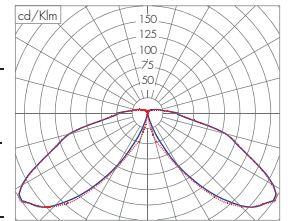

Symmetric


Wall

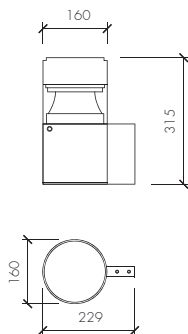

- LED
- Reflector : Asymmetric
- Body : Die-cast Aluminium, PC
- Size : Ø160 x H165mm
- Height : 315mm
- Protection grade : IP65

Photometric data

P <sub>system</sub>	CCT	Φ <sub>system</sub>
LED 26W	3000K, 4000K	2400lm
LED 28W	2700K	

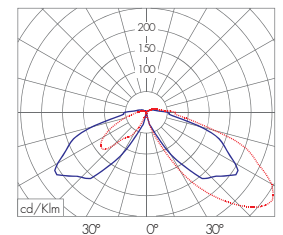

Asymmetric

**ELO**

