


Recessed spotlights

VECTO VDM




- Lighting technology LED
- Tilting and turning (360°/0°-20°)
- With integral reflector SP, MFL, FL or WFL
- Supply unit included
- Connection data: 220-240 V, 50/60 Hz
- Connection to power supply by Wieland plug GST18i3; wire length l = 0.5 m
- DALI and EASY-Lighting Control system is possible (Easy Lighting Control not for use in metal ceilings)
- Weight approx. 0.8 kg
- Colors: white/anthracite/silver

ERC  IP20

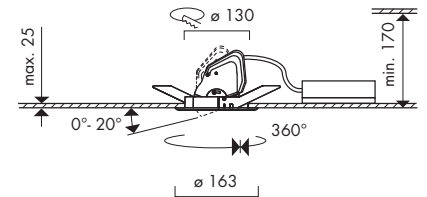

| Photometric data | CRI Light colour | Lumen category | P _{system} | Efficiency | Reflector |
|--|-----------------------------|----------------|---------------------|------------|-----------|
| | 830 | 2000 lm | 17 W | 125 lm/W | |
| | 3000 lm | 29 W | 107 lm/W | | |
| 840 927 Brilliant (930) = Best Color/Best White | Photometric data on request | | | | |

The photometric values are standard values and refer to the entire luminaire.
In the case of CRI ≥ 90 the efficiency is approx. 10-15 % lower.

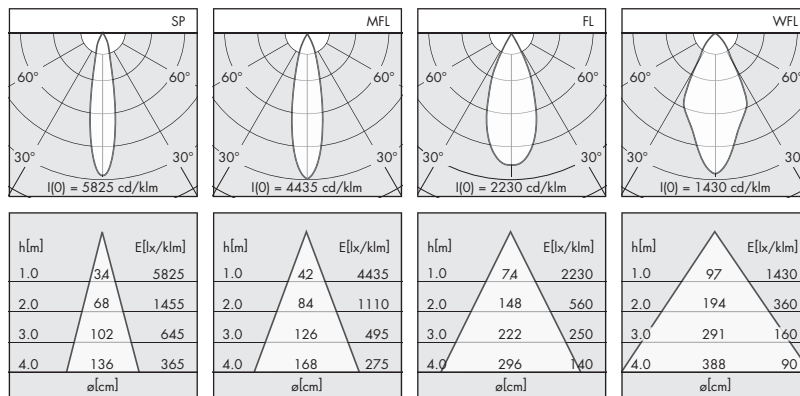

Optional accessories

Interchangeable reflector

SP
MFL
FL
WFL

Article number

17 HLC 610-...
17 HLC 810-...
17 HLC 210-...
17 HLC 110-...